


# Model : HA1060F1808PG

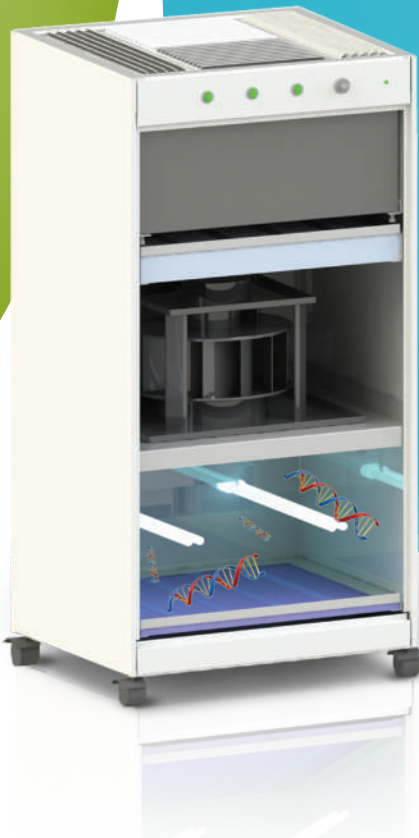

- Capacity: 1000 CFM
- Dimensions: 23" X 23" X 50" (W X D X H)
- Weight: 158 lbs
- Color: White
- Motor: EC Motor with speed control
- Voltage Options: 120V/1/50-60 Hz / 220V / 1 / 50-60 Hz
- Amps: 10
- Cord: 6'
- Sound Performance:

Estimated sound power level in each octave band

| Frequency | 63 | 125 | 250 | 500 | 1K | 2K | 4K | 8K | Db (A) - 1M |
|-----------|----|-----|-----|-----|----|----|----|----|-------------|
| LW        | 57 | 60  | 63  | 62  | 66 | 63 | 57 | 52 | 59 bA       |


- Coverage area suggested as per air changes  
ACH - Air change per hour - 10' ceiling height

| ACH  | 4    | 5    | 6    | 7   | 8   | 9   | 10  | 11  | 12  |
|------|------|------|------|-----|-----|-----|-----|-----|-----|
| SQFT | 1500 | 1200 | 1000 | 857 | 750 | 666 | 600 | 545 | 500 |

customer to factor in obstruction + barrier to airflow in space

## AVAILABLE MODELS

| MODEL / OPTIONS | UVC LIGHT | HEPA FILTER | PLASMA GENERATOR |
|-----------------|-----------|-------------|------------------|
| HA1060          | ✓         | ✗           | ✗                |
| HA1060PG        | ✓         | ✗           | ✓                |
| HA1060F1808     | ✓         | ✓           | ✗                |
| HA1060F1808PG   | ✓         | ✓           | ✓                |

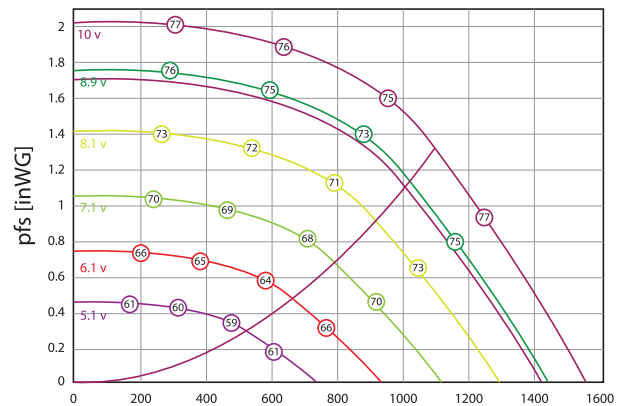

High Spot Discharge  
Plenum with Twin  
360 Degree  
Adjustable Elbow

## EASY CONVERTIBILITY

100% Negative  
Pressure System

Dual Mode  
Recirculation +  
Negative Pressure

